
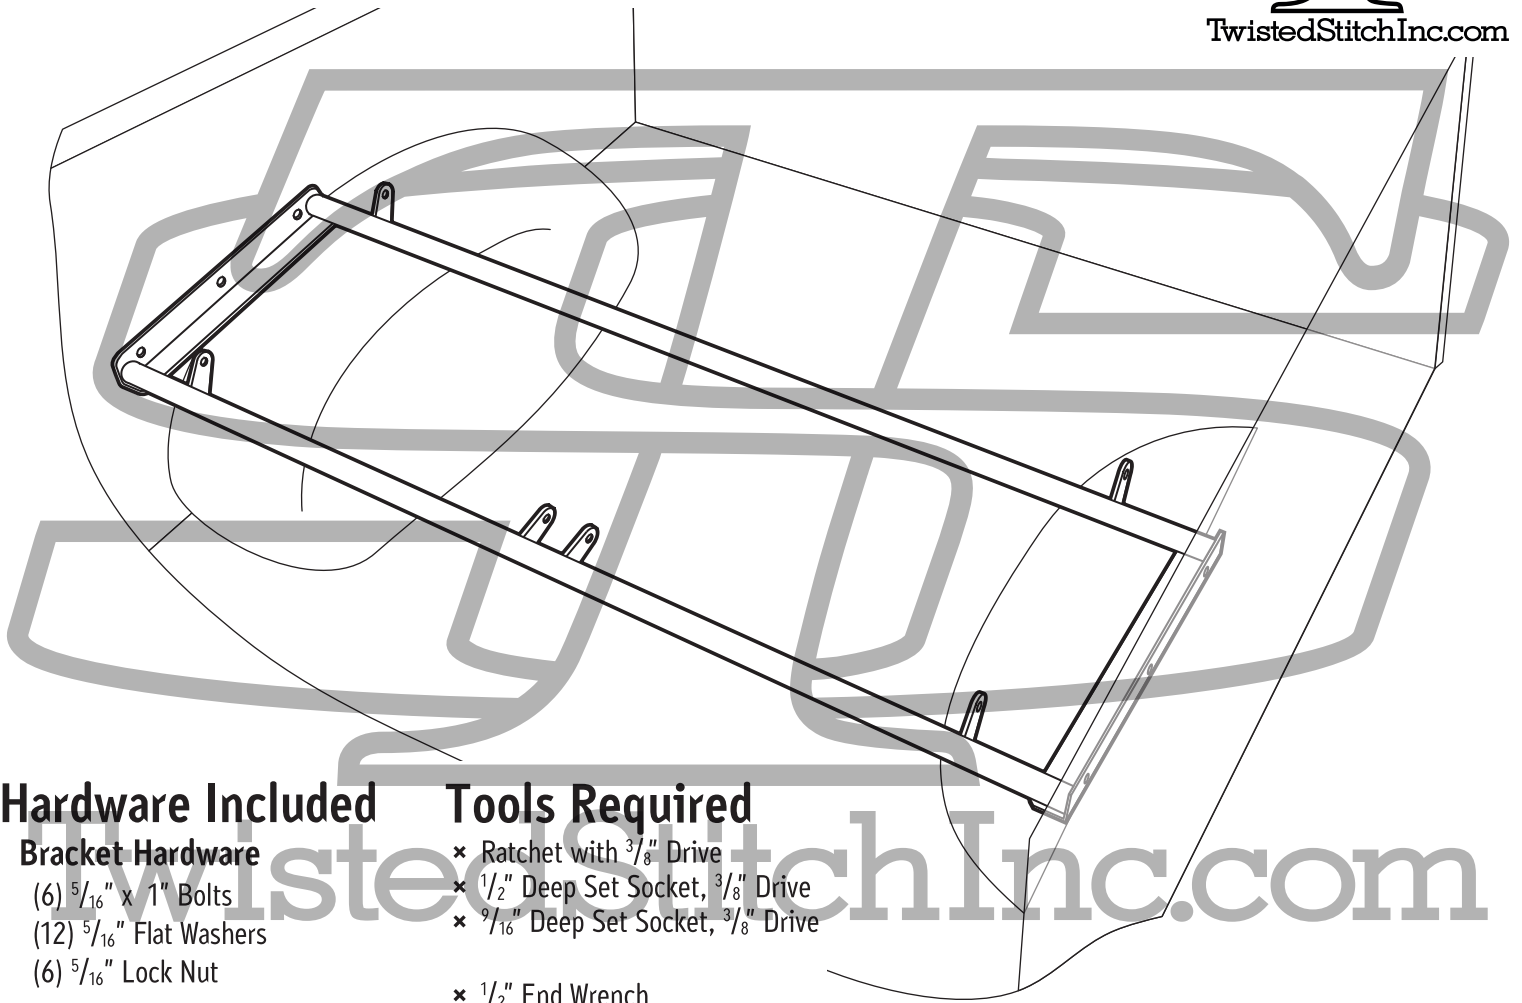


Bench Seat Installation

For Yamaha Rhino and Kawasaki Teryx



Hardware Included

Bracket Hardware

- (6) $\frac{5}{16}$ " x 1" Bolts
- (12) $\frac{5}{16}$ " Flat Washers
- (6) $\frac{5}{16}$ " Lock Nut

Bench Hardware

- (4) $\frac{3}{8}$ " x $1\text{-}\frac{1}{4}$ " Bolts
- (4) $\frac{3}{8}$ " Flat Washers
- (4) $\frac{3}{8}$ " Lock Nut

Tools Required

- × Ratchet with $\frac{3}{8}$ " Drive
- × $\frac{1}{2}$ " Deep Set Socket, $\frac{3}{8}$ " Drive
- × $\frac{9}{16}$ " Deep Set Socket, $\frac{3}{8}$ " Drive
- × $\frac{1}{2}$ " End Wrench
- × $\frac{9}{16}$ " End Wrench
- × Electric Drill
- × $\frac{5}{16}$ " Drill Bit (min. 3" long)

Installation Instructions

- 1: Mount the bench to the bracket using the supplied bench hardware.
- 2: Place the bench into the desired position, then mark side holes onto the inside of the bed.
- 3: Remove the bench and bracket from the bed.
- 4: Using the $\frac{5}{16}$ "th drill bit, drill through the marks made in step 2.
- 5: Install the bracket using the supplied bracket hardware. Include a flat washer under each bolt head and lock nut.
- 6: Re-install the bench to the bracket with the supplied bench hardware.
- 7: Check that all bolts are tightened securely.



Must be used in conjunction with a rear roll cage and safety harness